

# DVC500

## DC/DC converter



Abbildung ähnlich / device similar to figure



DVC500-derivate table

Type	Input voltage		Output voltage	Output current	Cat. No.
	Nom.	Range	Nom.	Max.	
DVC500-36-24	36 VDC	25 - 70 VDC	24,3 VDC	21 A	105119
DVC500-48-12	48 VDC	33 - 90 VDC	12,5 VDC	40 A	105114
DVC500-48-13,8	48 VDC	40 - 90 VDC	13,8 VDC	36 A	105112
DVC500-48-13,8/ITO12	48 VDC	40 - 90 VDC	13,8 VDC	36 A	105112/1
DVC500-48-24	48 VDC	33 - 90 VDC	24,3 VDC	21 A	105115
DVC500-80-12	72/80/96/110 VDC	56 - 154 VDC	12,5 VDC	40 A	105116
DVC500-80-13,8	72/80/96/110 VDC	56 - 154 VDC	13,8 VDC	36 A	105109
DVC500-80-24	72/80/96/110 VDC	56 - 154 VDC	24,3 VDC	21 A	105117

## DC/DC converter

## DVC500

Alle Daten gemessen bei tbd, tbd und 25°C Umgebungstemperatur, wenn nicht anders gekennzeichnet. | All parameters are specified at tbd, tbd and 25°C ambient, if not marked otherwise.  
 Technische Änderungen und Irrtümer vorbehalten. | Technical modifications and mistakes reserved.

Mit den Angaben im Katalog und in den Datenblättern werden Produkte beschrieben, nicht Eigenschaften zugesichert. Belastung mit „Grenzwerten“ (einfache Kombination) ist zulässig ohne bleibende Schäden der Produkte. Betrieb der Geräte mit Grenzwertbelastung für längere Zeit kann die Zuverlässigkeit beeinträchtigen. Grenzwerttoleranzen unterliegen üblichen Schwankungen. | Products are described by information contained in catalogs and data-sheets. It is not be considered as assured qualities. Stresses listed under „Maximum Rating“ (one at a time) may be applied to devices without resulting in permanent damage. The operation of the equipment for extended periods may affect device reliability. Limiting value tolerance are subject to usual fluctuation margins.

# 1 Input

<b>Input voltage range</b>	-	see DVC500-derivate table (valid for continuous operation)
<b>Undervoltage range</b>	0 - 40 VDC (@IN 80 VDC) 0 - 24 VDC (@IN 48 VDC) 0 - 22 VDC (@IN 36 VDC)	Class C*
<b>Lower restricted operation range</b>	40 - 56 VDC (@IN 80 VDC) 24 - 40 VDC (@IN 48 VDC) 22 - 25 VDC (@IN 36 VDC)	Continuous operation, class B*
<b>Unrestricted operation range</b>	56 - 154 VDC (@IN 80 VDC) 40 - 90 VDC (@IN 48 VDC) 25 - 70 VDC (@IN 36 VDC)	Continuous operation, class A*
<b>Short time overvoltage</b>	154 - 220 VDC (@IN 80 VDC) 90 - 100 VDC (@IN 48 VDC) 70 - 80 VDC (@IN 36 VDC)	Class C* (< 20ms)

## \* Evaluation criteria for the operation behavior

The following evaluation criteria describe the functional state of the DC/DC converter as a function of the operation input voltage.

<b>Class A</b>	Unrestricted operation range	The DC/DC converter operates as designed in compliance with the tolerances specified in the data sheet.
<b>Class B</b>	Lower and upper restricted operation range	One or more functions may go beyond the specified tolerance. After returning to the unrestricted operation range, the DC/DC converter operates again as designed.
<b>Class C</b>	Undervoltage and overvoltage range	One or more functions do not work as intended. After returning to the unrestricted operation range, the DC/DC converter operates again as designed.

## 2 Output

<b>Output voltage <math>U_{nom}</math></b>	-	see DVC500-derivate table (valid for continuous operation)
<b>Ripple &amp; Noise</b>	100 mVss	Measuring bandwidth 20 MHz
<b>Max. continuous output current <math>I_{nom}</math></b>	-	see DVC500-derivate table
<b>Max. continuous output power <math>P_{nom}</math></b>	500 W	-
<b>Current limiting</b>	1,1 x $I_{nom}$	above 1,0 x $I_{nom}$ $U_{out}$ may sink
<b>Control deviation <math>U_{out}</math> load change stat.</b>	$\pm 0,5\%$ (typ. 0,3% = 80 mV) $\pm 1\%$	10% - 90% 0-100%
<b>Control deviation <math>U_{out}</math> load change dyn.</b>	$\pm 1,5\%$ (@OUT 24 VDC) $\pm 3,5\%$ (@OUT 12/13,8 VDC)	20% - 80%
<b>Recovery time</b>	< 1 ms	Duration from leaving the tolerance band until the permanently return to the tolerance band after a load step.
<b>Line regulation</b>	$\pm 0,1\%$	-
<b>Temperature drift</b>	-25°C ... +70°C: < 1% (typ. 0,5%) 0°C ... +60°C: typ. 0,2%	-
<b>Parallel connectable for power increase</b>	-	No control lead necessary (can be connected in series)
<b>Over voltage protection (output)</b>	-	Safety redundant regulation circuit, limiting action to U nominal +20% (typ.)
<b>Parallel operation</b>	-	unlimited, 100% redundancy requires external diodes, Option: Soft output regulation for more equal current partitioning in parallel mode (app. 500 mV voltage rise min/max)
<b>Control Input (OPTION) (Turn-ON Inhibit, galv. insulated control input)</b>	-	Release of (self inhibiting) output voltage or alternative turn-off output voltage by feeding 2 mA into control input (2-wire cable / o.r. 5 V / 12 V etc.)

### 3 Environment

Working temperature (environment)	-40°C ... +75°C	max. temperature base plate 100°C
Cold start temperature	≥ -25°C	-
Operating temperature	≥ -40°C	$I_{out} \geq 9 \text{ A}$
Overtemperature protection	-	Automatic shutdown in case of overtemperature, self reset after cool down
Storage temperature	-40°C ... +85°C	-
Humidity	100%	-
Dewing	allowed	-
Cooling	-	Natural convection / Cooling via contact to mounting surface
Degree of protection acc. to EN 60529	IP67	-

### 4 General data

Insulation strength	500 VDC 1,5 kVDC	Output / Enclosure Input / Output - Input / Enclosure
Average efficiency	typ. ca. 92% (depending on type)	Averaging of the efficiency values at 25%, 50%, 75% and 100% of the nominal output power.
No-load power	6,8 W (@IN 80 VDC) 6,3 W (@IN 48 VDC)	$U_{out} = U_{nom}$
No-load power with Inhibit function	2,0 W (@IN 80 VDC) 1,3 W (@IN 48 VDC)	$U_{out} = 0 \text{ VDC}$
Dimensions (LxWxH)	(222 (220) x 166 (122) x 71 (47)) mm	without connections, see fig. ??
Enclosure	Aluminium	-
Weight	ca. 2,7 kg	-

## DC/DC converter

## DVC500

Alle Daten gemessen bei tbd, tbd und 25°C Umgebungstemperatur, wenn nicht anders gekennzeichnet. | All parameters are specified at tbd, tbd and 25°C ambient, if not marked otherwise.  
 Technische Änderungen und Irrtümer vorbehalten. | Technical modifications and mistakes reserved.

Mit den Angaben im Katalog und in den Datenblättern werden Produkte beschrieben, nicht Eigenschaften zugesichert. Belastung mit „Grenzwerten“ (einfache Kombination) ist zulässig ohne bleibende Schäden der Produkte. Betrieb der Geräte mit Grenzwertbelastung für längere Zeit kann die Zuverlässigkeit beeinträchtigen. Grenzwerttoleranzen unterliegen üblichen Schwankungen. | Products are described by information contained in catalogs and data-sheets. It is not be considered as assured qualities. Stresses listed under „Maximum Rating“ (one at a time) may be applied to devices without resulting in permanent damage. The operation of the equipment for extended periods may affect device reliability. Limiting value tolerance are subject to usual fluctuation margins.

## 5 Standards

### EMC (Electromagnetic Compatibility)

Title	Standard	Data
Emitted interference	EN12895 EN 61204-3	- acc. to 6.4.2, table H.3, for industrial environment (class A, cable length < 3 m)
Immunity	EN12895 EN 61204-3	- acc. to 7.2.3, Noise immunity level for industrial enviroment (cable length < 3 m)

### Electrical safety

Title	Standard	Data
Safety of industrial trucks - Electrical requirements	DIN EN 1175*	-
Low-voltage switch mode power supplies - Safety requirements	DIN EN 61204-7	-

\* The system integrator is responsible for compliance of all product-specific requirements in the end application.

## DC/DC converter

## DVC500

Alle Daten gemessen bei tbd, tbd und 25°C Umgebungstemperatur, wenn nicht anders gekennzeichnet. | All parameters are specified at tbd, tbd and 25°C ambient, if not marked otherwise.  
Technische Änderungen und Irrtümer vorbehalten. | Technical modifications and mistakes reserved.

Mit den Angaben im Katalog und in den Datenblättern werden Produkte beschrieben, nicht Eigenschaften zugesichert. Belastung mit „Grenzwerten“ (einfache Kombination) ist zulässig ohne bleibende Schäden der Produkte. Betrieb der Geräte mit Grenzwertbelastung für längere Zeit kann die Zuverlässigkeit beeinträchtigen. Grenzwerttoleranzen unterliegen üblichen Schwankungen. | Products are described by information contained in catalogs and data-sheets. It is not be considered as assured qualities. Stresses listed under „Maximum Rating“ (one at a time) may be applied to devices without resulting in permanent damage. The operation of the equipment for extended periods may affect device reliability. Limiting value tolerance are subject to usual fluctuation margins.

## 6 Installation and safety instructions

In addition to the general installation and safety instructions for DC/DC converters, the following values and supplements apply:

<b>Mounting points</b>	2x Mounting holes (Ø9,0 mm )	see fig. ??
<b>Installation orientation</b>	-	any
<b>Connection input</b>	+Uin (M5) / -Uin (M8)	-
<b>Connection output</b>	+Uin (M6) / -Uin (M8)	-
<b>Important safety note</b>	-	If an external energy source (e.g. battery) is connected to the output of the converter, the supply line (+ pole) must be fused close by the source. Recommended fusing: $1,1 \dots 1,2 \times I_{nom}$
<b>Input fuse</b>	T20A/250V (@IN 48/80 VDC) T35A/32V (@IN 36 VDC)	No integrated input fuse. A fuse must be provided externally by the customer application.
<b>Inrush current limitation</b>	-	Attention: No inrush current limitation in the device. Provide a precharging section in the application, otherwise there is a risk of a overvoltage damage to the input of the DC/DC converter.
<b>Reverse polarity protection</b>	-	On reverse polarity external input fuse (upstream) is blown
<b>Filtering</b>	-	Filtered against vehicle on board disturbances

The general installation and safety instructions for DC/DC converters can be found at: [www.deutronic.com](http://www.deutronic.com)

## 7 Dimensions

All dimensions are given in millimeters and have a general tolerance according to DIN ISO 2768 - m.

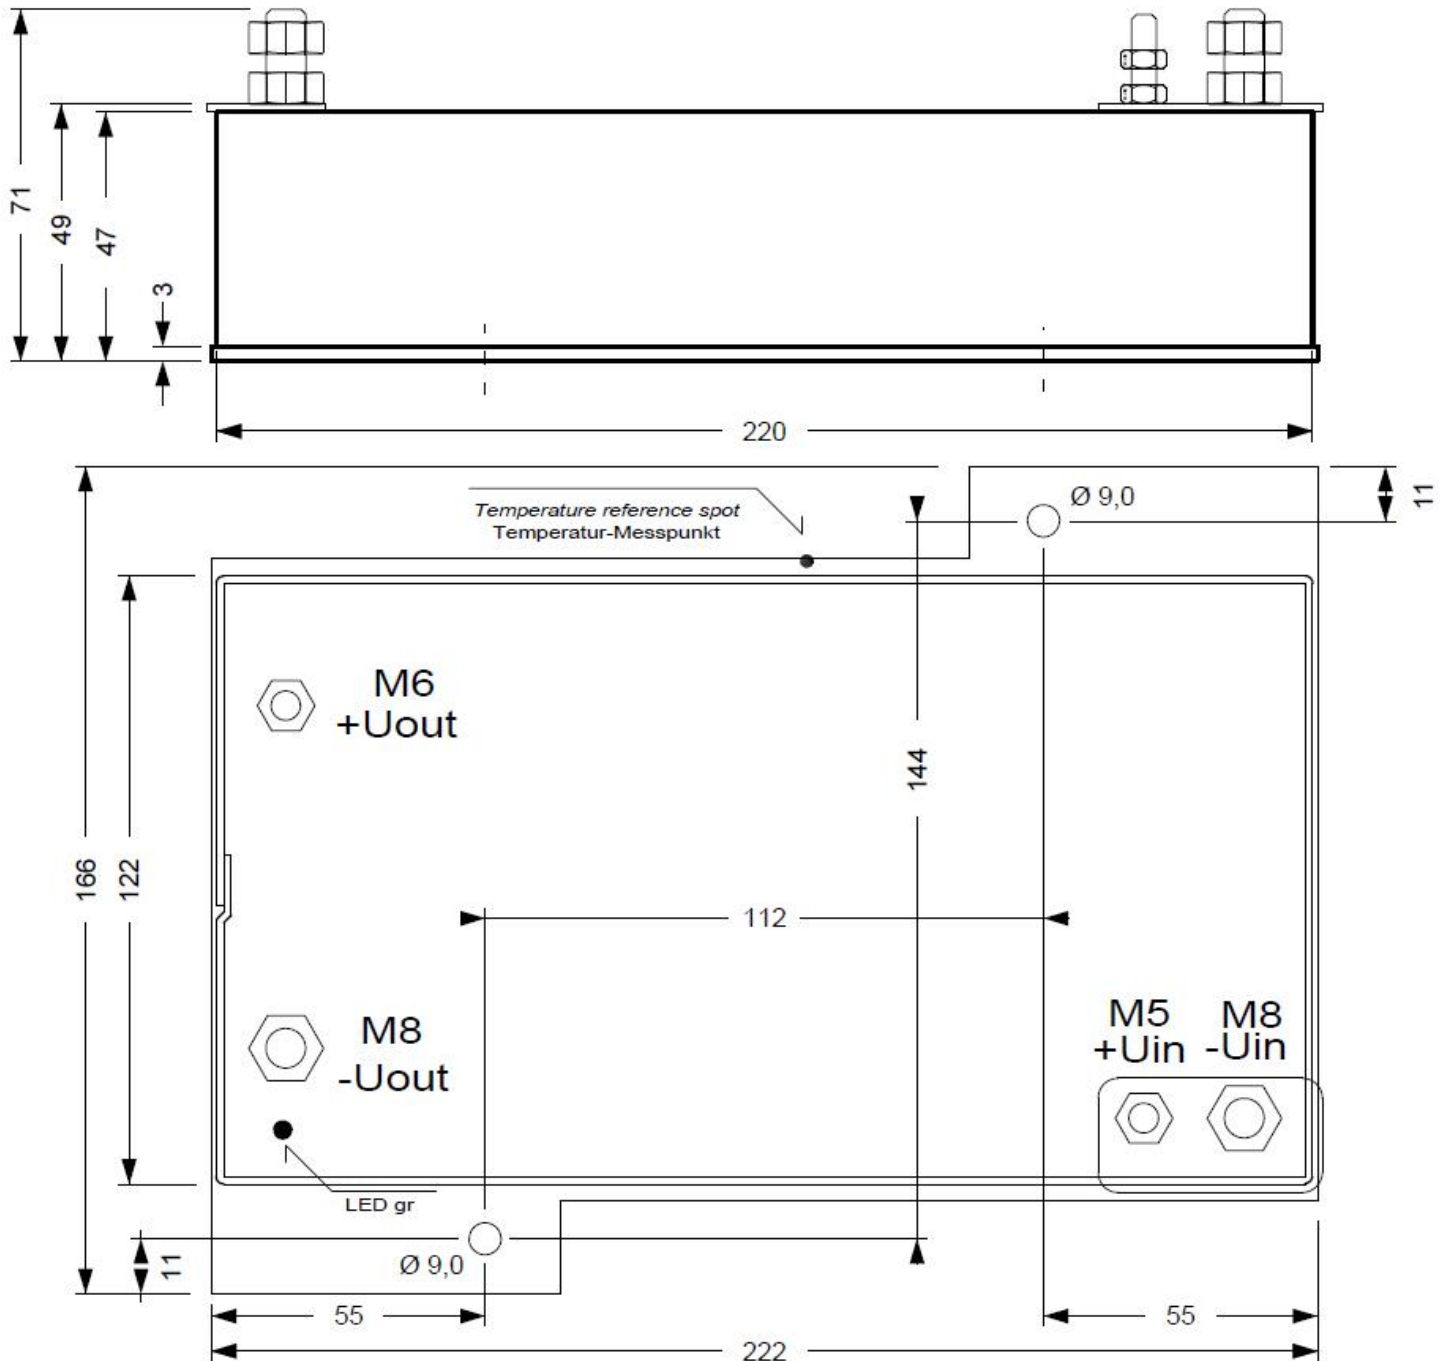


Figure 7.1: Dimensions

## DC/DC converter

## DVC500

Alle Daten gemessen bei tbd, tbd und 25°C Umgebungstemperatur, wenn nicht anders gekennzeichnet. | All parameters are specified at tbd, tbd and 25°C ambient, if not marked otherwise.  
 Technische Änderungen und Irrtümer vorbehalten. | Technical modifications and mistakes reserved.

Mit den Angaben im Katalog und in den Datenblättern werden Produkte beschrieben, nicht Eigenschaften zugesichert. Belastung mit „Grenzwerten“ (einfache Kombination) ist zulässig ohne bleibende Schäden der Produkte. Betrieb der Geräte mit Grenzwertbelastung für längere Zeit kann die Zuverlässigkeit beeinträchtigen. Grenzwerttoleranzen unterliegen üblichen Schwankungen. | Products are described by information contained in catalogs and data-sheets. It is not be considered as assured qualities. Stresses listed under „Maximum Rating“ (one at a time) may be applied to devices without resulting in permanent damage. The operation of the equipment for extended periods may affect device reliability. Limiting value tolerance are subject to usual fluctuation margins.